

SELECT AN END FIXITY TYPE A, B, C or D

END
FIXITY A



A: One end supported with a Double Bearing EZZE-MOUNTTM, other end Free. NOTE: Not recommended for any application other than short travels and slow speeds.

END
FIXITY B




B: One end supported with a Double Bearing EZZE-MOUNTTM, other supported with a Single Bearing EZZE-MOUNTTM.

END
FIXITY C



C: Both ends supported with a Double Bearing EZZE-MOUNTTM.

END
FIXITY D

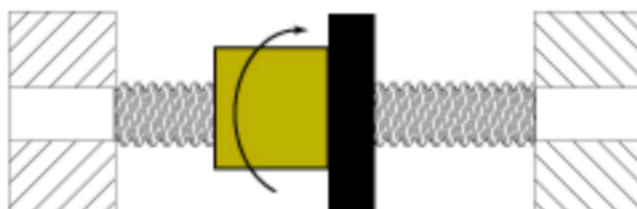

D: Both ends rigidly mounted with rotating nut or both ends mounted with a double preloaded angular contact bearing spaced apart by least 1.5 time the diameter of the mounting journal.